

*Alarm box with  
flash lamp*



-  Ultra bright LED flash light
-  IP65 protection
-  Single-phase power supply
-  Protection against shorts-circuits (fuses)
-  Connection of the alarm flash device of any control device with a fault report
-  Control by float switches


# Description

IP65 alarm box with ultra-bright LED flash lamp primarily intended for lifting applications. It can be used as signaling equipment in any other desired application.

All you have to do is connect this alarm device to any equipment with output for fault report.

Use this device by connecting a level float switch to the alarm terminals, or any other control device voltage free contact (dry-contact). The flash lamp lights up when the alarm contact is closed.

# Layout

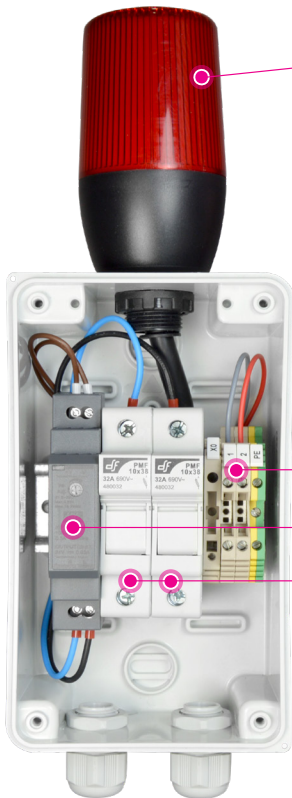

# Description


## Red LED flash lamp

- Ultra bright LED diodes
- Diameter 55 mm
- IP65 protection
- Maximum voltage 24 VDC
- Maximum consumption 2 W

## Interior Layout

- Alarm and earth terminals
- VDC power supply
- Circuit breaker (fuses included)

# Wiring diagram

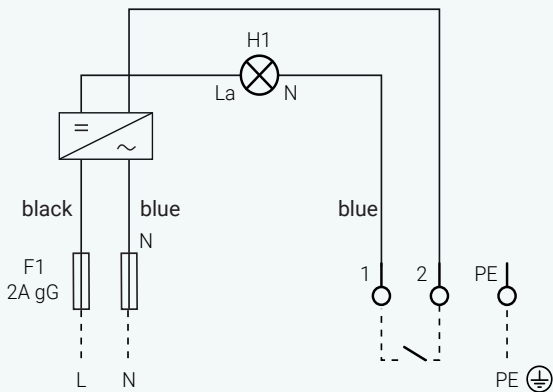

# Technical characteristics

|                                    |                                      |
|------------------------------------|--------------------------------------|
| Supply voltage                     | 230 VAC                              |
| Maximum consumption                | 15 W                                 |
| Protection against shorts-circuits | Fuses 10x38 mm 2A gG 500V (included) |
| Cable cross section max.           | 2,5 mm <sup>2</sup>                  |
| Ingress Protection                 | IP65                                 |
| Operating temperature              | -10...+55 °C                         |
| Cable glands                       | Supply: 1xM16 / Control: 1xM16       |
| Dimensions (A x B x C)             | 305x102x105 mm                       |
| Approximate weight                 | 0,7 Kg                               |

Code and reference  
10003248 FLASH-BEACON-BOX

