


UR1-P / UR1-R

Ed. 4.23


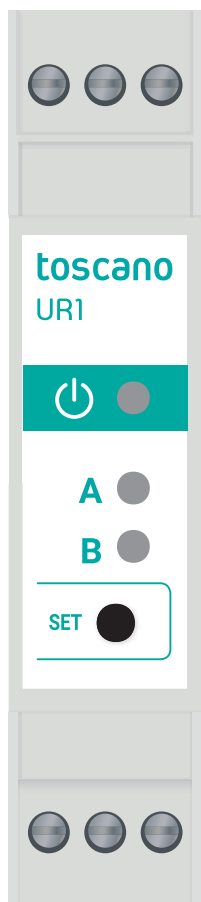


ENGLISH (EN) User manual

Radio control equipment



1. SIGNALLING AND CONTROL

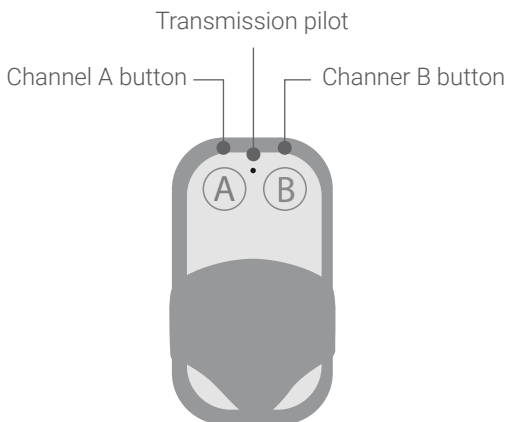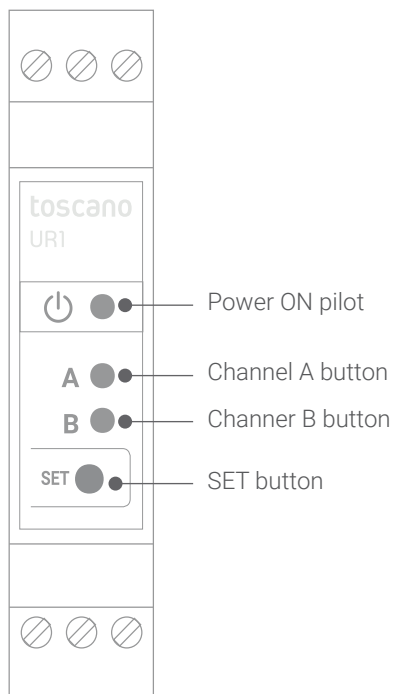


UR1-P

Output hold: the output will be active as long as the remote button of the output is pressed.

UR1-R

Output hold: activates/deactivates the pulsed output with a single button press of the remote.


2. CONNECTION

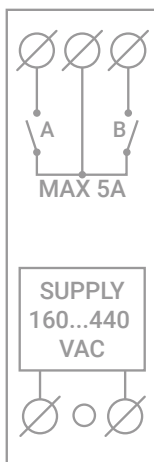

3. FUNCTIONS


○ Memorise a new command

Press and release the SET button on the module.

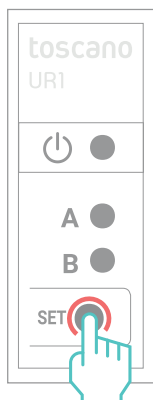


To memorise a new control unit, the memorised control units must first be deleted.

Press and release button A on the remote control.




Press and release button B on the remote control.



○ Delete all memorised controls

Press and hold the SET button for 10 seconds

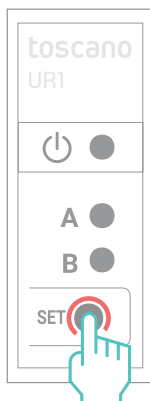

10 SEC.

4. TECHNICAL CHARACTERISTICS

Receiver

Power supply	160...440 VAC - 50/60 Hz
Pilots lights(LED)	Power supply, Channel A activated, Channel B activated
Power consumption	2 VA
Operating frequency	433 MHz
Receiver sensitivity	-107 dBm
Operation temperature	-10°...+60° C
Relay outputs	5 A / 250 VAC max.
Maximum terminal cross-section	2,5 mm ²
Weight/IP	58 g / IP20
Size (AxBxC)	90x64x18

Control unit

Power supply	Battery 12 VDC size 27A
Operating frequency	433 MHz
Transmission power	10 mW
Distance	up to 20...25 metres maximum
Operation temperature	-10°...+60° C
Size (AxBxC)	30x55x9

